



V1P-4K

Quick Start Guide

The information in this manual is subject to change without notice.
www.rexingusa.com

Activate Your
**18-Month
Warranty**
& Choose Your
FREE Gift!

Activate within 30 days of purchase to claim your free gift and extend your limited 12-month warranty to 18 months.

Scan The QR To Activate &
Select Your Free Gift

**SCAN
ME!**




<https://www.rexingusa.com/productreg/>

1. Overview

Thank you for choosing **Rexing!**

We hope you love your new products as much as we do. If you need any assistance, or have any suggestions to help us improve, please contact us.

 **care@rexingusa.com**

 **(877) 740-8004**

Our support team will respond to you as soon as possible.
Always a surprise in Rexing.

Check us out here

- <https://www.facebook.com/rexingusa/>
- <https://www.instagram.com/rexingdashcam/>
- <https://www.rexingusa.com/support/registration/>
- <https://www.rexingusa.com/support/product-support/>

 **Facebook**



 **Instagram**



 **Site**



 **Product Support**



2. What's in the Box

1.



2.



3.



4.



5.



6.



7.



8.



9.






1. Rexing V1P-4K Dash cam
2. Car Charger
3. Mount Plate & 3M Adhesive
4. Warning Sticker
5. Rear Camera
6. Cable Management Tool
7. Cable Clips
8. Quick Start Guide
9. Safety Guide
10. Electrostatic Sticker

10.



3. Camera Overview

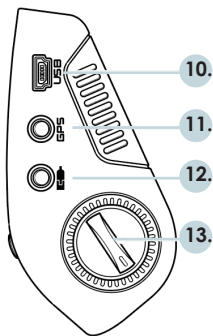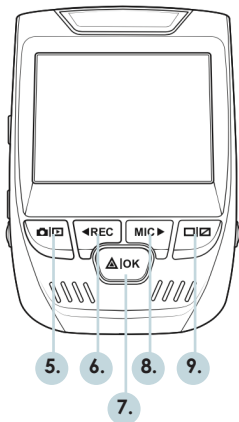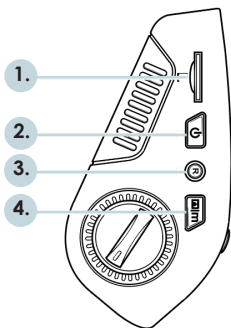

1. Micro SD Card Slot
2. Power Button
3. Reset Button
4. Menu Button
5. Mode Button
6. REC (Record) Button
7. OK (Confirm) Button
8. MIC Button
9. Screen Button
10. Mini-USB Port
11. GPS Logger Port
12. Rear Camera Port
13. Lens Angle



*

The camera is recording when the LED is flashing red.

**

The device is charging or powered on when the LED is solid blue.

Screen Icons

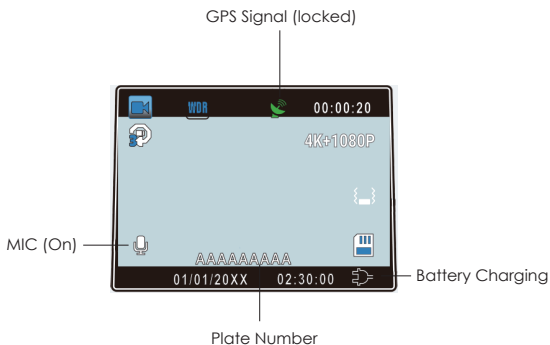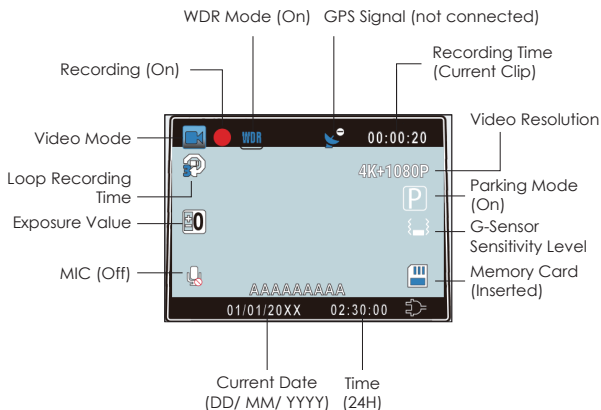

4. Installation


Step 1: Installing the Electrostatic Stickers

1.1 Prepare Your Windshield

Thoroughly cleanse your windshield with either water or alcohol. Follow this by wiping it dry using a clean, dry cloth to ensure a spotless surface.

1.2 Position the Sticker


Next, carefully peel off the protective film from the electrostatic sticker. Attach the sticker to the windshield, ideally behind the rear-view mirror. This position is recommended to avoid obstructing your view while you're on the road.

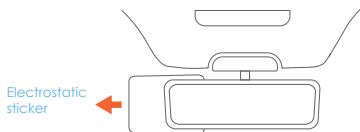

Step 2: Install the Dash Cam

Place the 3M adhesive on the mount plate and properly orient the mount piece to the roof and hood line of the vehicle.


Important! Ensure the T-interlock on the mount is oriented in the correct direction. Firmly press the mount onto the windshield.

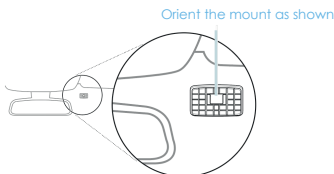

Step 3: Insert the Memory Card

The Rexing VIP-4K accepts [Class 10/ UHS-1 or higher] Micro SD memory cards up to 512GB. You will need to insert a memory card **before you can begin recording. Before inserting or removing a memory card, first ensure you've powered down the device.**

Gently push the memory card in until you hear a click, and allow the spring release to push the card out.

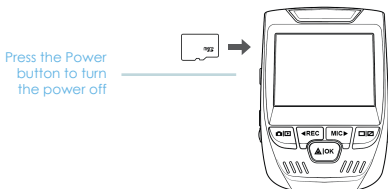


Step 4: Power the Camera and Format the Memory Card


Power the camera by connecting the charger to the car cigarette lighter and the camera

To ensure the VIP-4K records to your memory card properly and without error. **Before you start using a new memory card, you must format the card within the camera using the format function.** Always backup important data stored on the memory card before formatting.

To format the memory card, make sure you have inserted your memory card, **then turn on the device by connecting to a power source.** Press **REC** to stop recording. Then press the **MENU** button **twice** to enter the system Setup Menu. Use the **REC** and **MIC** buttons and go to the Format settings. Press the **OK** Button to confirm the selection.

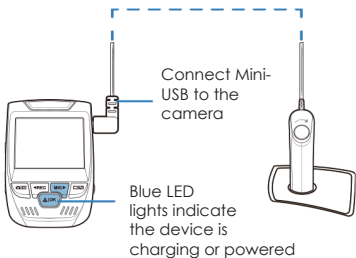


You may now disconnect from power. The camera will shut down after 3 seconds. The camera should begin recording automatically the next time it is powered on.

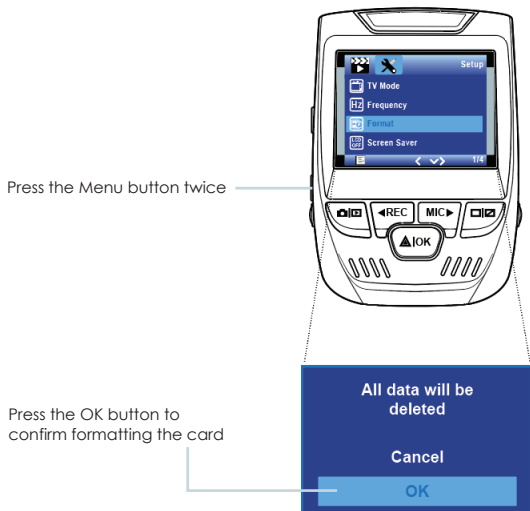

Step 5: Mount the Rear Camera

Mount the rear camera as shown below. Use the provided rear camera cable to connect the rear camera to the front camera.

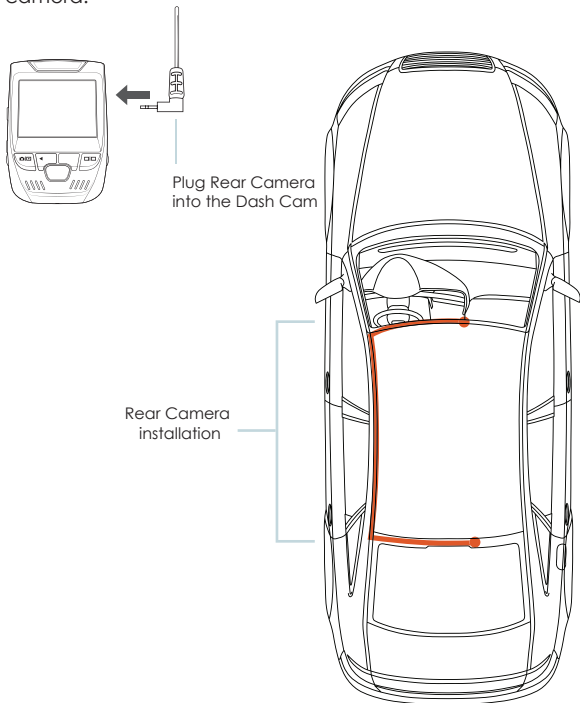


Step 6: Installing the Camera onto the Windshield

Place the camera on the mount and carefully route the power cable around the windscreen and tuck in under the trim.

Plug the Car Charger Cable into a 12V DC power outlet or the car cigarette lighter.

Connect car charger to the camera. The camera will auto-start recording once powered on.

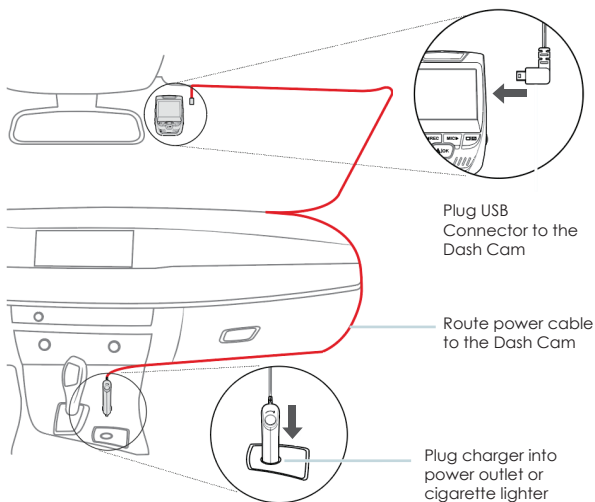

5. Basic Operation


Device Power

The device is automatically powered on when plugged into a 12V accessory socket or cigarette lighter and receives a charge (i.e.: the vehicle is started.)

To turn the device on manually, press and hold the **POWER** button until the welcome screen appears.

The camera will automatically start recording when powered on.


Press an hold the POWER button
to turn the device on manually

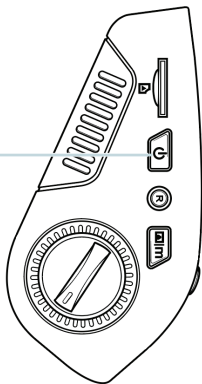

Menu Settings

Power the camera on. If the camera is recording, press the REC button to stop recording. Press the **MODE** button to toggle to the desired mode.

Press the **MENU** button **once** to enter the settings menu for a Mode. Press the MENU button twice to enter the System Settings.

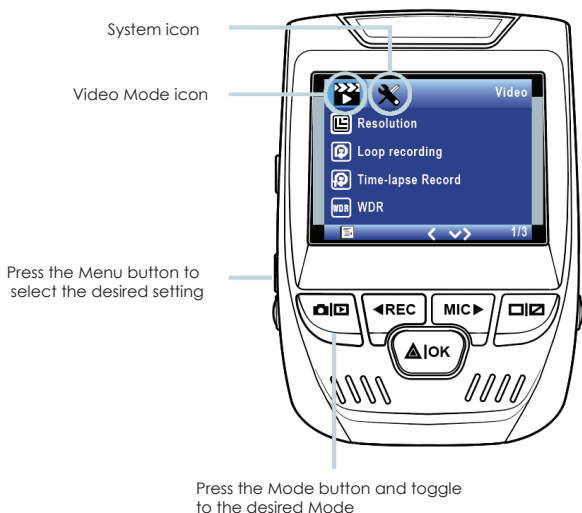



The camera automatically start recording when powered on

Video Recording

The camera will automatically start recording when the device receives a charge. The LED lights and the red dot will blink when the device is recording. Press the **REC** button to stop recording.

Video Playback

Playback of videos can be done on the device or a computer. Also, if you have purchased a Rexing GPS Logger you may play back the recordings in a specialized application.

To playback a video on the device, toggle to the Playback mode. Use the **REC** and **MIC** buttons to toggle to the desired video. Press the **OK** button to play.


Playback mode



Control playback with these buttons

During playback use the **OK** (pause), **MIC** (fast forward), and **REC** (rewind) buttons to control the video playback.


To playback a video on the computer, either use an SD card adapter or connect the device to the computer directly using the USB to Mini USB cable.



To playback a video using an SD card adapter, remove the memory card and insert it into an SD card adapter. Place the adapter in the computer.

To playback a video using USB cable, connect the USB Cable to the device and the computer. After the device powers up, press the **OK** Button to select Mass Storage.

On the computer, navigate to the device drive. The video are stored at: `\CARDV\MOVIE`. Select the video to playback.

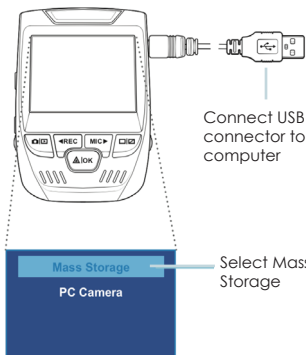


Parking Monitor (Parking Surveillance Mode)

Parking monitor provides surveillance on your parked vehicle. When the engine is off, the hardwire kit is used to provide continuous power and protect your car battery from being discharged.

Option 1: Vibration Detection

To enable the Parking Monitor, you'll need to connect it with a Smart Hardwire Kit (sold separately).

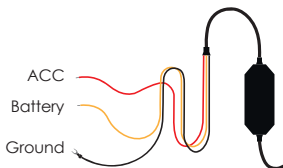

This feature will allow the dash cam to switch to parking mode automatically if the vehicle's engine turns off and switch back to the normal recording after the vehicle's engine turns on.

Gravity Sensing Record:

The Gravity Sensing detects significant or sudden movement (such as an impact or collision), it will trigger an event recording. We suggest setting the "Gravity Sensing" to High sensitivity for Parking Mode Recording.

Note:

If you do not use the parking mode function, please change the Gravity Sensing sensitivity to low. Otherwise, the video will

easily be locked and the video cannot be deleted by the loop recording function. This will cause the memory card to be full of locked videos and cause the recorder to fail to work normally.

Please DO NOT ENABLE the Parking Monitor function in the settings of the dash cam WITHOUT connecting a smart hardwire kit. Otherwise it may cause a malfunction.

Option 2: Motion Detection

To use this feature, you need to connect it with a Rexing Intelligent Hardwire Kit (sold separately).

Make sure that the Parking Mode is turned off on your dash cam, otherwise it may cause a malfunction.

Once the sensor has detected MOTIONS. The intelligent hardwire kit will power up the dash cam automatically and start recording until the MOTION is cleared.


Please go to <https://www.rexingusa.com/hwk-install/> to watch a video tutorial about the installation or scan the QR code below.



Wi-Fi Connect

Step 1


With your dash cam powered on, hold the **REC** navigation button to enable the Wi-Fi function. The Wi-Fi name (aka the SSID) and password for the dash cam should be displayed on-screen.



Step 2

On your mobile device, navigate to your Wi-Fi settings. Connect to your dash cam's Wi-Fi by tapping its name when it appears. Enter your dash cam's Wi-Fi password if you are prompted to do so.


Note: On some mobile devices, you may have to try to connect more than once. To ensure you've successfully connected, your mobile device's screen should resemble the examples shown.



Step 3

Once you're connected to the dash cam, open the Rexing Connect app on your mobile device.

Please select "Keep Trying Wi-Fi" if you see the notification on the right.



Step 4

In the app, hit the "Connect" button to connect to your dash cam, allowing you to access live view and view/download your recordings.

Note: Hold to the **REC** button for 2 seconds to disconnect the Wi-Fi.

Rexing Connect App

Easily download the app by scanning the QR code below or search via the App Store or Google Play



Wi-Fi Connect Troubleshooting

If you bring up the Rexing Connect app and cannot connect your phone to the dash cam please go to <https://www.rexingusa.com/wifi-connect/> OR scan the QR code below.



GPS Logger

(Need to purchase separately)

When connected to the camera, it will record the speed and location of your vehicle as you drive.

The dash cam will automatically search for the GPS signal once it's connected to the power source.

You can then access this information while playing back your recordings using the GPS Video player. For Windows and Mac, available at <http://www.rexingusa.com/support/rexing-apps/>.

Press the **MENU** button twice and enter the System Settings.

Toggle to the GPS Speed Unit setting and select your preferred speed unit.

After a GPS signal is found, the screen icon will turn from blue to green.

Please visit gpsa.rexingusa.com to

GPS Date-Time Troubleshooting

If your dash cam GPS date and time are incorrect please go to

<https://www.rexingusa.com/gps-date-time/>
OR scan the QR code below.

GPS Signal

(not connected)



GPS Signal

(active)



Taking Photo

To take a photo, stop video recording and toggle to the Photo Mode. Press the **OK** Button to take a photo.

To view a photo, stop video recording and toggle to the Playback Mode. Press the **REC** and **MIC** Buttons to toggle through your photos.

To delete a photo, stop video recording and toggle to the Playback Mode and toggle through the videos and photos to the one you want to delete. Press the **MENU** button once and toggle to the Delete option. Press the **OK** Button and select Delete Current or Delete All.


Toggle to the Playback mode and select a photo to view



Toggle to the Delete option



Choose the desired option



Warranty & Support

Warranty

The Rexing VIP-4K Dash Cam comes with a full 12-month warranty. If you register your product on our official site (<https://www.rexingusa.com/support/registration>), you can extend the warranty to 18 months.

Support

If you have any questions regarding your product, please do not hesitate to contact us at care@rexingusa.com, or call us at (877) 740-8004. Queries are typically answered within 12-24 hours.

Your opinion matters

Rexing is firmly committed to always improving our products, services, and user experience. If you have any thoughts on how we can do even better, we welcome your constructive feedback and suggestions.

Connect with us today at care@rexingusa.com

Thank you for choosing Rexing!

FCCID: 2AW5W-V1P-4K

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

REXING®



MADE IN CHINA